



MARINE DIESEL ENGINES

1GM10 Series

4-stroke, vertical, water-cooled diesel engine			
6.6 kW@3600 rpm	[9 mhp@3600 rpm]		
318 L	[19.41 cu in]		
5 mm x 72 mm	[2.95 in x 2.83 in]		
vertical			
Indirect injection [special swirl type pre-combustion chamber]			
Natural aspiration			
Electric starting 12V - 1.0 kW with manual combination			
12V – 40A			
Direct seawater cooling by rubber impeller seawater pump			
Enclosed, forced lubricating system			
Counterclockwise viewed from stern			
1 kg	[156,5 lbs]		
U: RCD 2	BSO II	EMC	
S: EPA Tier 2			
Rubber type flexible mounting			
	An a L mm x 72 mm vertical lirect injection [special swirl type tural aspiration ectric starting 12V - 1.0 kW with V - 40A ect seawater cooling by rubber closed, forced lubricating system unterclockwise viewed from stem kg : RCD 2 : EPA Tier 2	Attack[19.41 cu in]mm x 72 mm[2.95 in x 2.83 in]vertical	


NOTE:


Fuel condition: Density at 15° C = 0.84 g/cm³; 1 kW = 1.3596 mhp = 1.3410 HP * Fuel temperature 40°C at the inlet of the fuel injection pump [ISO 8665: 2006] Technical data is according to ISO 8665: 2006/3046-1

DIMENSIONS

Rear view

Right side view





1GM10 with KM2P-1 marine gear





PERFORMANCE CURVES




MARINE GEARS/DRIVE*

Model	KM2P-1 (parallel)			Saildrive [SD25]	
Туре	Mechanical cone clutch			Constant mesh gear with dog clutch	
Dry weight	9.8 kg [22 lbs]			30 kg [66 lbs]	
Reduction Ratio [fwd/rev]	2.21/3.06	2.62/3.06	3.22/3.06	2.64/2.64	
Propeller speed [fwd/rev]	1629/1176	1374/1176	1118/1176	1364/1364	
Direction of rotation		Clockwise		Counterplackwing	
(viewed from stern)	Clockwise			Counterclockwise	
Dry weight - engine & gear	81 kg [178 lbs]			104 kg [229 lbs]	
Length engine and gear/drive	554 mm [22 in]			723 mm [29 in]	

* Other marine gearboxes and configurations available upon request. Contact your local supplier for more information

INSTRUMENT PANELS

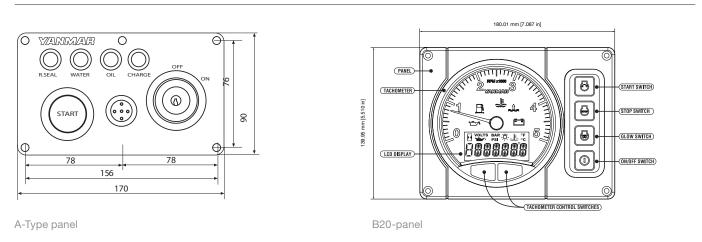

ACCESSORIES

Standard engine package

- Sensor for instrument panel
- Rubber type flexible mounts
- Exhaust mixing elbow [L-type]
- Alternator 40A

Optional accessories

- A-Type panel
- B20-panel
- Various extension wire harnesses
- Propeller cone nut kit SD25